

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 182 846 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
27.02.2002 Bulletin 2002/09

(51) Int Cl.7: **H04L 29/12, H04L 29/06,
H04Q 7/38**

(21) Application number: **01304278.3**

(22) Date of filing: **14.05.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Chen, Xiaobao X.**
Swindon, Wiltshire SN5 5DQ (GB)
• **Paparella, Andrea**
21052 Busto Arsizio, Varese (IT)

(30) Priority: **21.08.2000 GB 0020585**

(74) Representative: **Sarup, David Alexander et al**
Lucent Technologies NS UK Limited, 5
Mornington Road
Woodford Green, Essex IG8 OTU (GB)


(71) Applicant: **LUCENT TECHNOLOGIES INC.**
Murray Hill, New Jersey 07974-0636 (US)

(54) **A method of supporting seamless hand-off in a mobile telecommunications network**

(57) To deliver packets to the MAC of a roaming mobile in a seamless manner, a proxy ARP is set up, in addition to the usual ARP, and is informed of the COA

and MAC address of the mobile. The proxy ARP then informs the last routing switch in the foreign network of the MAC address of the mobile.

FIG. 1

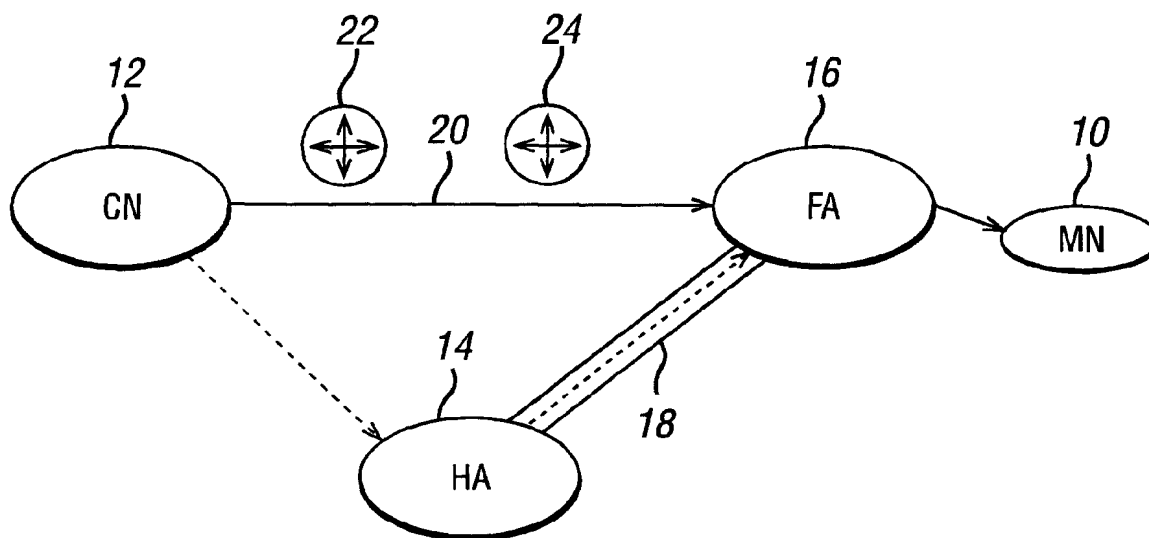

Description

[0001] This invention relates to a method of supporting seamless hand-off in a mobile telecommunications network, especially to hand-offs to a roaming mobile terminal in the network..

[0002] In third generation telecommunications networks such as GPRS (General Packet Radio Service) and EDGE (Enhanced Data-rate for GSM Evolution), when a mobile terminal moves into a foreign network, network connectivity is optionally maintained by the use of Mobile Internet Protocol (Mobile IP). In the home network, a Home Agent (HA) is set up which maintains the location information of the mobile by use of Binding Updates, i.e., registration of information sent to the HA by the mobile node.

[0003] Mobile IP has two working modes. The first is illustrated in Figure 1; a mobile terminal is currently attached as a Mobile Node (MN) 14 in a network different from its home network. The MN 14 is communicating with a Correspondent Node (CN) 12. A Home Agent 16 is set up in the home network by the CN 12, and a Foreign Agent (FA) 18 is set up in the foreign network. The FA 18 allocates a unique IP address for the visiting mobile, a Care of Address (COA) and this address is sent to the HA 16 in a Binding Update.

[0004] Packets for the mobile are encapsulated by the HA 16 and tunneled along tunnel 20 to the FA 18 for transmission to MN 14. In such encapsulation, an extra IP header is added to each packet, including the COA of the MN 14. This is known as FA-COA working mode.

[0005] In the second working mode (not illustrated) there is no FA, the MN 14 is allocated a unique COA and encapsulated packets are tunneled by HA 16 directly to MN 14; this is known as Collocated Care of Address mode of working (CO-COA).

[0006] In a conventional packet switched network, when a host A sends a packet to another host B, host A needs to determine the Media Access Control (MAC) address of host B so that the packet can be delivered to the correct physical address in layer 2. Host A sends a MAC broadcast frame, called an Address Resolution Protocol (ARP) request frame, which contains the host A's IP and MAC addresses and the IP address of host B. All nodes in the local network receive the broadcast IP request frame, and compare the destination address with their own IP address. Only the node with the correct IP address of the ARP request responds by sending a ARP reply containing its MAC address. On receiving the ARP reply, host A updates its ARP cache, which usually times out periodically. After an ARP cache entry has timed out for a specific host, the ARP request is sent again to discover the MAC address of the destination. The ARP cache is consulted by a host before it sends an ARP request, and if the answer is found in the cache, the host does not need to generate an ARP request.

[0007] It is known to provide a proxy ARP which is an ARP reply sent by one node on behalf of another node which is unwilling or unable to answer its own ARP requests. The sender of a proxy ARP reverses the sender and target protocol address fields and supplies some configured MAC address (generally its own) in the sender hardware address field (the place-holder field). The node receiving the reply then associates this link-layer address with the IP address of the original target node, so that future packets for this target node are transmitted to that MAC address.

[0008] When a mobile roams it maintains connectivity by the use of a unique IP address allocated to it, a Care-of-Address, as explained above. By use of Mobile IP, a packet sent from a correspondent node to a mobile node can still use the home address of the mobile node no matter where the mobile moves to. The packet received in the foreign network needs to bear the current Care of Address of the mobile as the destination address. If applications running on the mobile node still use the home address of the mobile, there is seamless mobility support to those applications; the applications do not have to stop and re-start as the mobile roams.

[0009] However, before the packet can be sent from the last routing switch in the foreign network to the current Care of Address from the mobile, the routing switch needs to know the MAC address of the mobile. In the current functional specifications of ARP and of Mobile IP, this entry cannot be created. Referring again to Figure 1, in the terms used above, either CN 12 or MN 10 can be host A, the other being host B. In either direction, packets passed through the network from router to router, and in Figure 1 two routers 22, 24, are shown schematically adjacent the optimized route 20. Suppose packets are passing from CN 12 to FA 16 via routers 22, 24; before a packet can be sent from router 24 to the current Care of Address of MN 10, router 24 needs to know the MAC address of MN 10, as stated above.

[0010] The routers 22, 24 can alternatively be associated with the encapsulated route 18.

[0011] It is the object of the invention to provide a method of supporting seamless hand-off in a mobile telecommunications network of the type described above.

[0012] According to the invention, in a third generation mobile telecommunications network, a method of delivering packets in layer 2 to a mobile terminal in a foreign network comprises the steps of:-

- providing an Address Resolution Protocol (ARP) entity;
- setting up a home agent in the home network; and
- allocating a Care of Address to the mobile node;

characterized by the further steps of:

setting up a proxy ARP entity; and

informing the proxy ARP entity of the Care of Address and the Media Access Control address of the mobile node.

[0013] In the invention, in addition to the proxy ARP entity, a Dynamic Host Configuration Protocol (DHCP) can also be used. The proxy ARP server can be built into the DHCP server, or it can be in a stand alone node. The proxy ARP is informed of the Care of Address and the MAC address of the MN 10; this can be achieved during the mobile node registration process; either the proxy ARP advertises itself and receives a registration reply from the MN 10, or the MN 10 solicits the proxy ARP by broadcasting a proxy ARP soliciting request, and the proxy ARP replies to confirm the registration.

[0014] The foreign network proxy ARP controls operations in two different cases, when there is transmission from CN 12 to MN 10, and when there is transmission in the opposite direction.

[0015] In the first case, transmission from CN 12 to MN 10, when the working mode is COCOA mode, when a packet from the CN 12 arrives at the last routing switch of the foreign network, i.e. switch 24, the switch broadcasts an ARP request, with the frame format:-

Sender's MAC	Sender's IP address	MN's MAC (NULL)	MN's COA
--------------	---------------------	-----------------	----------

[0016] The proxy ARP receives the broadcast message and compares the receiver's IP address with the registered Care-of-Address of the MN 10. If a match is found, the proxy ARP sends an ARP reply message having the format:-

MN's MAC	MN's COA	Sender's MAC	Sender's IP address
----------	----------	--------------	---------------------

[0017] When the switch 24 receives the ARP reply, it updates its ARP cache table by adding an entry with the unique mapping between the Care-of-Address and the MAC address of MN 10. The switch 24 can then successfully deliver the packet to MN 10 at the correct address in layer 2.

[0018] When the working mode is FA COA mode, the FA 16 replies to any request for its MAC address, sending the FA COA as the IP address of the mobile node.

[0019] In the second case, transmission from MN 10 to CN 12, there is a preliminary stage. Before a packet is sent by MN 10, the ARP module in MN 10 or the daemon running in MN 10 checks whether the destination of the packet (i.e. CN 12) is a node which is local to the home network of the MN 10. If the destination is in the home network, then the MN 10 broadcasts its ARP request using its own home IP address as the sender's address. The ARP request format is:-

MN's MAC	MN's Home IP Address	CN's MAC (NULL)	CN's IP Address
----------	----------------------	-----------------	-----------------

[0020] When the proxy ARP receives the ARP request, it responds by sending an ARP reply message to the MN 10 in the format:-

FN Default Gateway's MAC	CN's IP Address	MN's MAC	MN's IP address
--------------------------	-----------------	----------	-----------------

[0021] Consider now the position when the destination is not in the home network of MN 10.

[0022] In the foreign network (FN) there is a Default Gateway; this Default Gateway broadcasts an ARP request message and the proxy ARP server learns the IP address of the foreign network Default Gateway by receiving this message. The MN 10 broadcasts an ARP request using the Default Gateway in the foreign network as the destination IP address. The ARP request format is:-

MN's MAC	MN's Home IP Address	FN's Default Gateway MAC(NULL)	FN's Default Gateway's IP address
----------	----------------------	--------------------------------	-----------------------------------

[0023] When the proxy ARP receives the broadcast, it sends an ARP reply message to the MN 10 in the format:-

FN Default Gateway's MAC	FN Default Gateway IP Address	MN's MAC	MN's Home IP Address
--------------------------	-------------------------------	----------	----------------------

[0024] The packet can therefore be successfully delivered to the CN 12.

[0025] In another variation, the ARP proxy can be built as a daemon running in the MN 10, care being taken that it

does not affect the standard ARP daemon in the MN 10.

[0026] By application of the method according to the invention, seamless hand-off can be achieved even when a mobile is roaming in a foreign network.

Claims

1. In a third generation mobile telecommunications network, a method of delivering packets in layer 2 to a mobile node (10) in a foreign network comprises the steps of:-

providing an Address Resolution Protocol (ARP) entity;
setting up a home agent (14) in a home network of the mobile node;
allocating a Care of Address to the mobile node (10); and
setting up a Dynamic Host Configuration Protocol (DHCP); **characterized by** the further steps of:

setting up a proxy ARP entity; and
informing the proxy ARP entity of the Care of Address and the Media Access Control address of the mobile node.

2. A method according to Claim 1 in which packets are transmitted from the correspondent node (12) to the mobile node (10) and the Care of Address is a Collocated Care of Address comprising the further steps of:-

a last routing switch (24) in the foreign network broadcasting an ARP request;
the proxy ARP responding with an ARP reply message containing the MAC address of the mobile node (10);
the last routing switch (24) updating its ARP cache table by adding a unique mapping between the Care of Address and the MAC address of the mobile node (10); and
the last routing switch (24) delivering the packet to said MAC address.

3. A method according to Claim 2 in which the ARP request from said last routing switch has the frame format:-

Sender's MAC; Sender's IP address; MN's MAC (NULL); MN's COA; and the ARP reply from the proxy ARP server has the frame format :-
MN's MAC; MN's COA; Sender's MAC; Sender's IP Address.

4. A method according to Claim 1 in which packets are transmitted from the mobile node to the correspondent node comprising the further steps of the ARP entity checking whether the destination of the packets is a node in the home network of the mobile node, and if so, the mobile node sending an ARP request using its own home IP address as the sender's address; and the proxy ARP responding with a ARP reply addressed to the MN's IP address.

5. A method according to Claim 4 in which the ARP request from the MN has the frame format:-

MN's MAC; MN's Home IP Address; CN's MAC (NULL); CN's IP address; and the ARP reply from the proxy ARP server has the frame format:-
FN Default Gateway's MAC; CN's IP Address; MN's MAC; MN's IP address.

6. A method according to Claim 4 in which the destination of the packets is a node which is not in the home network of the mobile node, comprising the further steps of the mobile node sending an ARP request using the MAC address of a Default Gateway in the foreign network as the sender's address;

the Default Gateway receiving the ARP request and broadcasting it; and
the proxy ARP responding by sending an ARP reply to the MN.

7. A method according to Claim 6 in which the ARP request from the MN has the frame format:-

MN's MAC; MN's Home IP Address; HN's Default Gateway (NULL); HN's Default Gateway's IP address;

and the ARP reply from the proxy ARP server has the frame format:-

EP 1 182 846 A2

FN Default Gateway's MAC; HN Default Gateway's IP Address; MN's MAC; MN's Home IP Address.

5

10

15

20

25

30

35


40


45

50

55

FIG. 1

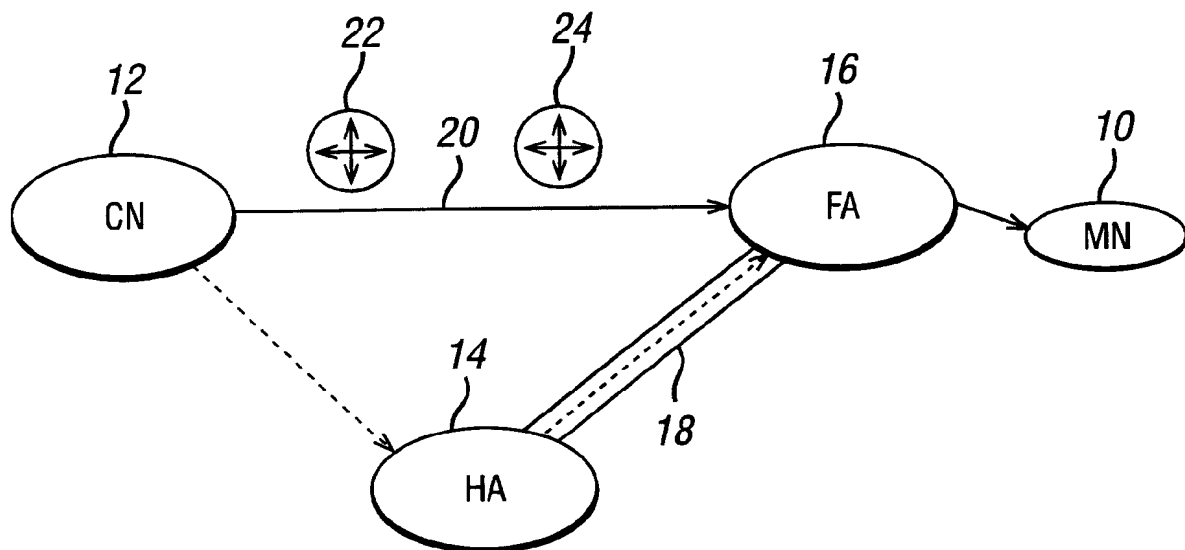



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 182 846 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
14.05.2003 Bulletin 2003/20

(51) Int Cl.7: **H04L 29/12, H04L 29/06,
H04Q 7/38**

(43) Date of publication A2:
27.02.2002 Bulletin 2002/09

(21) Application number: **01304278.3**

(22) Date of filing: **14.05.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Chen, Xiaobao X.**
Swindon, Wiltshire SN5 5DQ (GB)
• **Paparella, Andrea**
21052 Busto Arsizio, Varese (IT)

(30) Priority: **21.08.2000 GB 0020585**

(74) Representative: **Sarup, David Alexander et al**
Lucent Technologies NS UK Limited,
5 Mornington Road
Woodford Green, Essex IG8 OTU (GB)


(71) Applicant: **LUCENT TECHNOLOGIES INC.**
Murray Hill, New Jersey 07974-0636 (US)

(54) **A method of supporting seamless hand-off in a mobile telecommunications network**

(57) To deliver packets to the MAC of a roaming mobile in a seamless manner, a proxy ARP is set up, in addition to the usual ARP, and is informed of the COA

and MAC address of the mobile. The proxy ARP then informs the last routing switch in the foreign network of the MAC address of the mobile.

FIG. 1

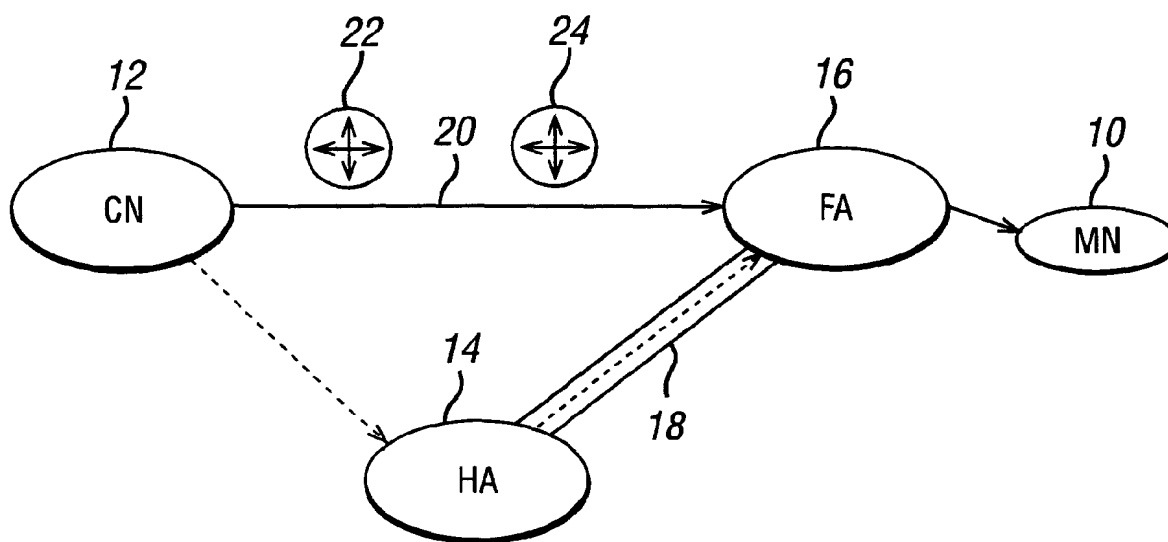

EP 1 182 846 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 4278

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 1 011 241 A (LUCENT TECHNOLOGIES INC) 21 June 2000 (2000-06-21) * column 2, line 40 - line 50 * * column 5, line 43-54; figure 1 * * column 3, line 12 - line 13 * * column 12, line 10 - line 13 * ---	1-7	H04L29/12 H04L29/06 H04Q7/38
Y	CACERES R ET AL: "Fast and scalable wireless handoffs in support of mobile Internet audio" MOBILE NETWORKS AND APPLICATIONS, BALTZER SCIENCE PUBLISHERS, BUSSUM, NL, vol. 3, no. 4, 1998, pages 351-363, XP002135845 ISSN: 1383-469X * page 355, column 1, line 16 - line 29 * * page 351, line 10 - line 17 * ---	1-7	
A	WO 99 31853 A (BRITISH TELECOMM ;FLYNN JASON STUART (GB)) 24 June 1999 (1999-06-24) * page 1, line 4 - line 7; figure 1 * * page 2, line 23 - line 24 * * page 3, line 4 - line 11 * ---	1,2	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04L H04Q
A	PERKINS C E ET AL: "DHCP for mobile networking with TCP/IP" PROCEEDINGS IEEE INTERNATIONAL SYMPOSIUM ON COMPUTERS AND COMMUNICATIONS, XX, XX, 27 June 1995 (1995-06-27), pages 255-261, XP002132695 * page 256, column 2, line 59 - line 63 * * page 256, column 1, line 26 - line 29 * * page 258, column 1, line 15 - line 30 * -----	1,2	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 21 March 2003	Examiner Cankaya, S
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 4278

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-03-2003

Patent document cited in search report			Publication date		Patent family member(s)			Publication date	
EP 1011241	A	21-06-2000	EP	1011241 A1			21-06-2000		
			JP	2000183972 A			30-06-2000		

WO 9931853	A	24-06-1999	AU	745274 B2			14-03-2002		
			AU	1498099 A			05-07-1999		
			CA	2312972 A1			24-06-1999		
			CN	1282481 T			31-01-2001		
			EP	1053620 A1			22-11-2000		
			WO	9931853 A1			24-06-1999		
			JP	2002509391 T			26-03-2002		
